



BSC94

# Optio Inline Sliding Door

[aluk.co.uk](http://aluk.co.uk)

Experts in Aluminium

**ALUK**<sup>®</sup>

# Optio Inline Sliding Door

A premium sliding door with slim sightlines, available in a variety of sliding configurations using single, dual and triple track systems. The BSC94 offers high levels of performance, from thermal U-Values of 1.6W/m<sup>2</sup>K (double glazed), and with panel weights up to 400Kg. Smooth operation is guaranteed through the use of the highest quality fittings.




## DESIGN FEATURES

- Accepts 20 – 31mm double glazing
- Max 400kg panel weight
- Certified PAS 24
- Anti bi-metal polyamide strip to allow for varying expansion rates

## OPTIONS

- Available as Lift & Slide
- Slimmer sightline of 45mm available
- Multiple sliding configurations
- Mono, Dual or Tri rail options
- Available in single and dual colour; anodised finishes also available
- Range of hardware and security features


## CONFIGURATIONS

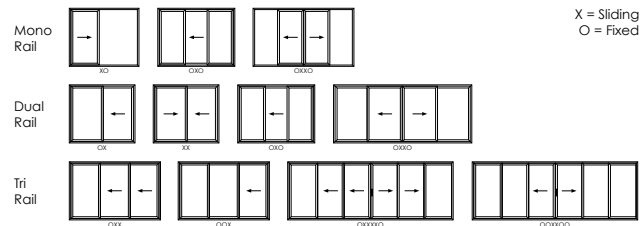

## SPECIFICATIONS

Performance and accreditation	BSC94	BSC94SLIM
U-value (double glazing)* (Ug = 1.0W/m <sup>2</sup> K) (Dual Rail)	1.6 W/m <sup>2</sup> K	1.6 W/m <sup>2</sup> K
Green guide rating	C rated	C rated
Acoustic performance (dB)	Rw (C;Ctr) 36 (-1;-3) dB**	npd
Air tightness (Pa)***	Class 4 (600 Pa)	Class 4 (600 Pa)
Water tightness (Pa)***	Class 7a (300 Pa)	Class 7a (300 Pa)
Wind load (Pa)***	C4 (1600 Pa)	C4 (1600 Pa)
Security – PAS24	✓	x
Configuration & frame		
Opening	Inline sliding	Inline sliding
Mono rail (105mm)	✓	x
Dual rail (94mm)	✓	✓
Tri rail (155mm)	✓	✓
Size limits		
Max vent weight****	400kg	400kg
Max frame height*	3000mm	3000mm
Max frame height with security features	2600mm	x
System features		
Dual colour option	✓	✓
Multi-point locking	✓	✓
Glazing options	Internal	Internal
Glazing thickness	20mm-31mm	20mm-31mm
Sightlines	85mm	45mm

## CAD CROSS SECTIONS

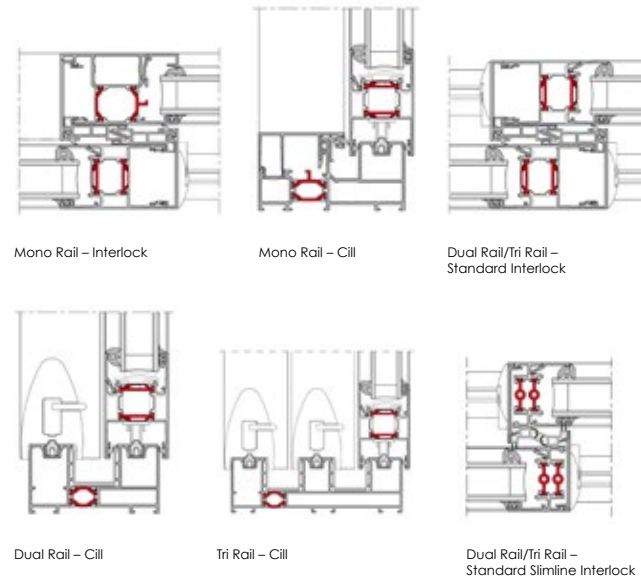

**AluK (GB) Limited**  
Newhouse Farm Ind Est  
Chepstow  
NP16 6UD  
+44 (0)1291 639 739

**AluK Design Studio**  
5-11 Worship Street  
London EC2A 2BH

[aluk.co.uk](http://aluk.co.uk)

\*U-Values based on CEN size door (4000mm x 2500mm).

\*\*Sound insulation values are Rw reduction values and are based on tests using acoustic glazing.

\*\*\*All weather test data taken from BS EN 6375-1 based upon highest performing door configuration.

\*\*\*\*Based on using double rollers.

\*Dependent on wind load and lock variation.

Note: npd = No performance declared

Please visit [www.aluk.co.uk](http://www.aluk.co.uk) to download all BIM components and CAD files.